





Patent number: CN1344408 (A)
Publication date: 2002-04-10
Inventor(s): YASUSHI KOJIMA [JP] +
Applicant(s): SANYO ELECTRIC CO [JP] +
Classification:
- **international:** G11B17/04; G11B17/04; (IPC1-7): G11B17/04
- **european:** G11B17/046; G11B17/046D
Application number: CN20008005216 20000321
Priority number(s): JP19990074770 19990319

Also published as:

 CN1145948 (C)
 EP1178481 (A1)
 US6802069 (B1)
 WO0057415 (A1)

[View INPADOC patent family](#)

[View list of citing documents](#)

[Report a data error here](#)

Abstract not available for CN 1344408 (A)

Abstract of correspondent: **EP 1178481 (A1)**

[Translate this text](#)

A holder 2 is pivotally supported on a chassis 1 for supporting a cartridge 60 which is provided with a shutter 61 biased by a spring 66 in a closing direction. A slide member 3 mounted on the holder 2 is reciprocatingly movable between a first position where an opening piece 31 pushes the shutter 61 open with the loading of the cartridge 60 into the holder 2 and a second position where the latch 30 engages the cartridge 60 after moving from the first position toward the cartridge loading direction. A release mechanism is disposed between the chassis 1 and the holder 2 for disengaging the latch 30 from the cartridge 60 when the cartridge 60 is unloaded from the holder 2. The cartridge 60 as disengaged and in contact with the opening piece 31 is moved by the spring 66 in the unloading direction.

FIG. 7A

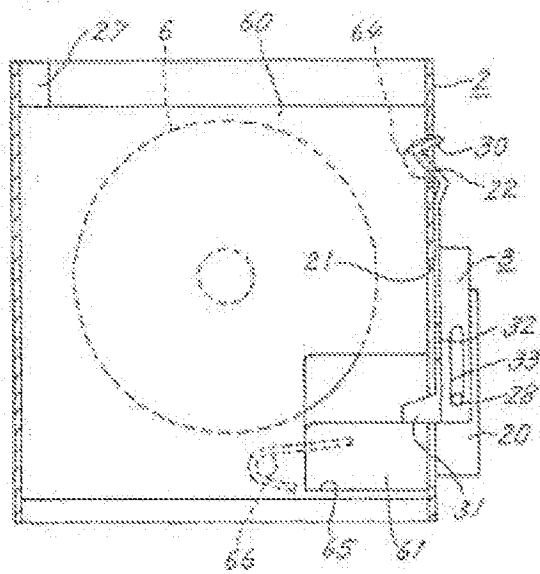


FIG. 7B

